

# Asti 300-28


Specification sheet

## Insert hood



Learn  
more

### MEASUREMENTS

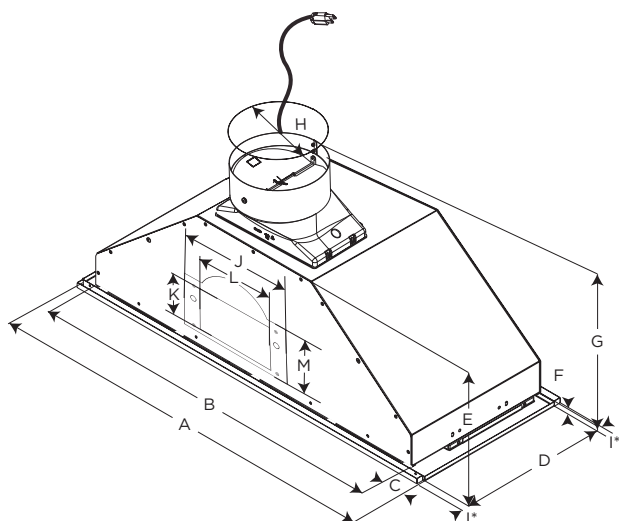

|    | EAS328S1           |
|----|--------------------|
| A  | 28 1/4" (71.8 cm)  |
| B  | 26" (66 cm)        |
| C  | 1 1/8" (2.9 cm)    |
| D  | 10 3/4" (27.3 cm)  |
| E  | 9 1/2" (24.2 cm)   |
| F  | 3/8" (.95 cm)      |
| G  | 14 9/16" (36.9 cm) |
| H  | 6" (15.2 cm)       |
| I* | 1/2" (1.2 cm)      |
| J  | 8 1/4" (21 cm)     |
| K  | 3 11/16" (9.4 cm)  |
| L  | 5 1/16" (14.5 cm)  |
| M  | 4 5/8" (11.8 cm)   |

I\* - Stainless steel spacers must be installed and used when cabinet depth is greater than 12"

### DESCRIPTION

Asti 300 is specifically created to be mounted discreetly inside cabinetry, with a perfect fit for 12" deep cabinetry and a 28" width, it is an excellent choice for kitchens with limited space or where the range hood needs to remain out of view. With a 300 CFM blower, Asti is capable of meeting most cooking needs. Its convenient mechanical push button controls operate the 3-speed blower and LED lighting, while its dishwasher-safe anodized aluminum mesh filters, ensure effortless maintenance. Asti is designed for both standard ducted and recirculating installations, now with a snap system that make it safer and easier to install.



### FEATURES

- 3x layer mesh
- Led light
- Super easy installation
- Top or rear outlet



#### GENERAL PROPERTIES

|                                        |                                                    |
|----------------------------------------|----------------------------------------------------|
| Width                                  | 28"                                                |
| Model                                  | EAS328S1                                           |
| Dimensions                             | 28 1/4"W x 10 3/4"D x 9 1/2"H                      |
| Blower Type <sup>1</sup><br>(Internal) | 300 CFM (3-speed)                                  |
| Noise<br>(Min-max sones) <sup>1</sup>  | 1.7-4.0 Sones                                      |
| Electrical                             | 120V-60Hz, 260W                                    |
| Illumination                           | 2 LED, 6.5W, 4000K, 235 Lumen                      |
| Finish                                 | Stainless Steel                                    |
| Controls                               | Mechanical push buttons                            |
| Grease filters                         | Dishwasher-Safe, Anodized aluminum mesh filter     |
| Installation type                      | Ducted or recirculating with kit (sold separately) |
| Duct transition                        | 6" round with back draft damper (top and rear)     |

#### KITS

|                   |                                                                 |
|-------------------|-----------------------------------------------------------------|
| Recirculating kit | KIT02770 (contains 2 carbon filters & 6" round deflector grate) |
| 30" hood liner    | KIT02773 (29"W x 17 1/2"-20 1/2"D x 4"H)                        |
| 36" hood liner    | KIT02774 (35"W x 17 1/2"-20 1/2"D x 4"H)                        |

#### WARRANTY:<sup>2</sup>

**Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.