


Lavello

Wallmount hood



Learn
more

MEASUREMENTS

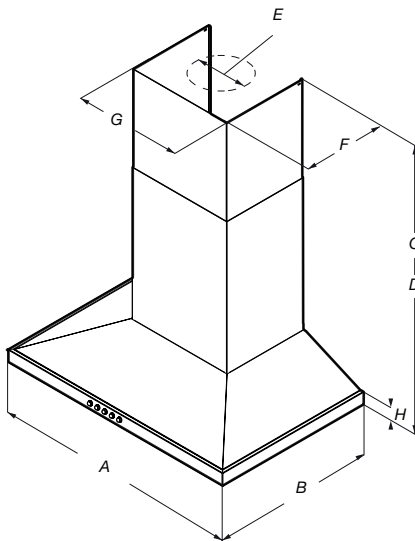

	ELV430SS	ELV436SS
A	30" (76.2 cm)	36" (91.4 cm)
B	19 1/16" (50 cm)	
C*	Min: 28 1/4" (71.8 cm) Max: 42 1/2" (108.1 cm)	
D**	Min: 24 5/8" (62.5 cm) Max: 38 3/4" (98.3 cm)	
E	6" (15.24 cm)	
F	10 5/8" (26.9 cm)	
G	13 1/16" (33.2 cm)	
H	1 9/16" (4 cm)	

*Ductless (recirculating)

** Ducted version

DESCRIPTION

This stylish, Italian-designed range hood keeps your kitchen fresh and free from smoke, grease, moisture, and odors. It features a powerful 400 CFM blower, electronic push buttons with a white backlight for convenience and safety, dishwasher-safe anodized stainless steel mesh filters for easy maintenance, and LED lighting to set the perfect mood.



FEATURES

 Led light



GENERAL PROPERTIES

Width	30"	36"
Model	ELV430SS	ELV436SS
Dimensions	30"W x 19 1/16"D x min:28 1/4" max:42 1/2"H	36"W x 19 1/16"D x min:28 1/4" max:42 1/2"H
Blower Type ¹ (Internal)	400 CFM (3-speed)	
Noise (Min-max sones) ¹	0.6-6.1 Sones	
Electrical	120V-60Hz,265W	
Illumination	2 LED, 2.1W, 4000K	
Finish	Stainless Steel	
Controls	Backlit electronic push buttons	
Grease filters	Dishwasher-Safe, Stainless steel mesh with anodization	
Installation type	Ducted or recirculating with kit (sold separately)	
Duct transition	6" round (Top Only)	

KITS

Chimney extension	KIT01935 (Reaches ceiling heights of 7'5"-10'5" (ducted),7'9"-10'9"(recirculating)) KIT02785 (Reaches ceiling heights of 8'5"-12'1" (ducted),8'9"-12'5"(recirculating))
Recirculating kit	KIT0102875 (contains 6" deflector and 3 round carbon filters)
CFM Reduction kit	KIT0175561 (achieves 280 CFM)

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.

¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.