

# Oristano


## Wall mount hood

Specification sheet



Learn  
more

### MEASUREMENTS

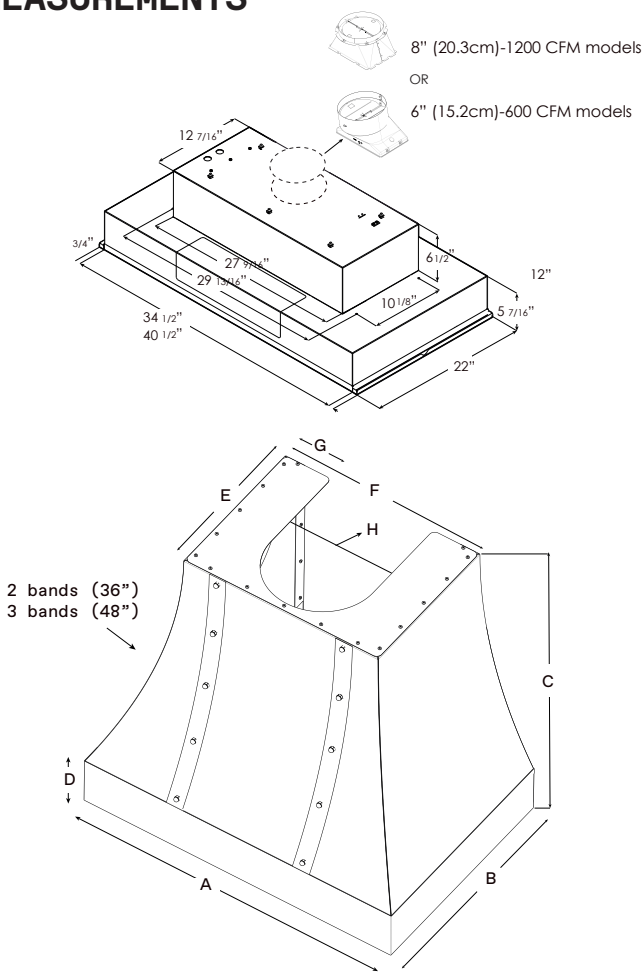

### DESCRIPTION

Inspired by the traditional architecture, glistening warm waters, and the relaxed pace of Oristano, the capital city of Sardinia Italy, Oristano has a tapered shape, seamless flow, mirrored stainless front rim, and decorative banding & rivets that deliver a statement and complement even the most exquisite kitchens.

Designed to support those with a passion for food & gourmet cooking, Oristano can be equipped with 600 or 1200 CFM blowers, soft LED lighting, plus Elica's patented HUSH sound suppression system will keep the conversation going. Available in 36 3/16" and 48" widths, and built with Italian craftsmanship and precision equipment that delivers seamless welding that is flawless, and a superior fit & finish that is noticeable.

The patented Easy Mounting system enables the hood to be installed in just 6 easy steps, and ducting out the rear wall is now possible.



### FEATURES

- Hush system
- Elica easy mounting
- Heat guard
- Top or Rear outlet
- Seamless look
- Professional performance
- Grease collectors

|   | EORX36S1           | EORX48S1           |
|---|--------------------|--------------------|
| A | 36 3/16" (91.9 cm) | 48" (122.1 cm)     |
| B | 24 5/16" (61.7 cm) | 24 5/16" (61.7 cm) |
| C | 30" (76.2 cm)      |                    |
| D | 5 1/2" (14 cm)     | 5 3/4" (14 cm)     |
| E | 17 5/16" (44 cm)   | 17 5/16" (44 cm)   |
| F | 22 3/4" (57.8 cm)  | 30 5/16" (78.8 cm) |
| G | 5 3/8" (13.7 cm)   | 9 1/2" (24.2 cm)   |
| H | 12" (30.4 cm)      | 12" (30.4 cm)      |



### GENERAL PROPERTIES

|                                   |                                                                                                                                                                                  |                                                         |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Width                             | 36 <sup>3</sup> / <sub>16</sub> "                                                                                                                                                | 48"                                                     |
| Model                             | EORX36S1                                                                                                                                                                         | EORX48S1                                                |
| Dimensions                        | 36 <sup>3</sup> / <sub>16</sub> "W x 24 <sup>5</sup> / <sub>16</sub> "D x 30"H                                                                                                   | 48"W x 24 <sup>5</sup> / <sub>16</sub> "D x 30"H        |
| Blower type:<br>(sold separately) | Requires purchase of insert hood<br>EAR634SS (600 CFM) or<br>EAR134S4 (1200 CFM)                                                                                                 | Requires purchase of insert hood<br>EAR140S4 (1200 CFM) |
| Finish                            | Stainless Steel<br>+Front and lateral rim - mirror stainless steel<br>+Decorative bands & rivets - mirror stainless steel<br>2 for 36 <sup>3</sup> / <sub>16</sub> " & 3 for 48" |                                                         |
| Installation type                 | 6 easy steps for mounting, compatible with Arezzo insert                                                                                                                         |                                                         |

### KITS

|                      |                                                                                               |                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Duct cover extension | KIT0182781-KIT0182781A (36" width x 6" tall)<br>KIT0182782-KIT0182782A (36" width x 18" tall) | KIT0182783-KIT0182783A (48" width x 6" tall)<br>KIT0182784-KIT0182784A (48" width x 18" tall) |
|----------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|

## 6 EASY STEPS FOR MOUNTING

**1** Drill using installation template.



**2** Fix support Brackets to wall and ceiling.




**3** Secure the insert hood to the lower support.



**4** Affix the ducting. Choose between Rear or Ceiling Outlet.



**5** Slip the fixed bolts on the shell into the eyelets in the vertical brackets, lay the top of the shell over the ceiling bracket. A solid connection will create a "click".



**6** Secure the insert hood to the Shell from the inside placing the screws on the corresponding drill holes.



\*For ceiling flush installation, an optional Trim Kit is available.

# Arezzo

## Insert hood



Oriстано Range Hood needs to be paired with the Arezzo Insert Hood.

### GENERAL PROPERTIES

| Width                      | 28 1⁄2”                                                 | 34 1⁄2”                                          | 40 1⁄2”                                   | 46 1⁄2”                                   |
|----------------------------|---------------------------------------------------------|--------------------------------------------------|-------------------------------------------|-------------------------------------------|
| Model                      | EAR628S4                                                | EAR634SS*<br>EAR134S4**                          | EAR140S4                                  | EAR146S4                                  |
| Dimensions                 | 28 1⁄2”W x 22”D x 11 7⁄8”H                              | 34 1⁄2”W x 22”D x 11 7⁄8”H                       | 40 1⁄2”W x 22”D x 11 7⁄8”H                | 46 1⁄2”W x 22”D x 11 7⁄8”H                |
| Blower Type¹<br>(Internal) | 600 CFM (4-speed)                                       | 600 CFM (4-speed)*<br>1200 CFM (4-speed)**       | 1200 CFM (4-speed)                        |                                           |
| Noise<br>(Min-max sones)¹  | 1.7-7.0 Sones                                           | 1.7-8.5 Sones*<br>1.7-7.0 Sones**                | 1.7-8.5 Sones                             |                                           |
| Electrical                 | 120V-60Hz,463W                                          | 120V-60Hz,490W*<br>120V-60Hz,913W**              | 120V-60Hz,926W                            |                                           |
| Illumination               | 2 LED, 6.5W, 3000K, 540 Lumen                           |                                                  | 4 LED, 6.5W, 3000K, 540 Lumen             |                                           |
| Finish                     | Stainless Steel                                         |                                                  |                                           |                                           |
| Controls                   | Fully Retractable Rotating Knobs with Blue backlighting |                                                  |                                           |                                           |
| Grease filters             | Dishwasher-Safe, Professional Stainless Steel Baffle    |                                                  |                                           |                                           |
| Installation type          | Ducted or Recirculating with Kit                        |                                                  |                                           |                                           |
| Duct transition            | 6” Round with Backdraft Damper (Top Only)               | 6” / 8”** Round with Backdraft Damper (Top Only) | 8” Round with Backdraft Damper (Top Only) | 8” Round with Backdraft Damper (Top Only) |

### KITS

| External Blower                 | KIT0153054 (1200 CFM blower 8" or 10" compatible)                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------|
| Inline Blower                   | KIT0154387 (1200 CFM blower 8" or 10" compatible)                                                         |
| Inline Blower Shell (1200 CFM)  | KIT0179549 (For use with 1200 CFM blower, 8" or 10" compatible)                                           |
| Inline Blower Shell (600 CFM)   | KIT0205342 (For use with 600 CFM blower, 6" compatible)                                                   |
| External Blower Shell           | KIT0179547 (For use with 1200 CFM blowers only)                                                           |
| Recirculation (600 CFM)         | KIT0192765 (4 round carbon filters) + KIT0195736 (6" round deflector)                                     |
| Recirculation (1200 CFM)        | KIT0192765 (4 round carbon filters) + KIT0192763 (8" round deflector)                                     |
| Electronic CFM Reduction Bypass | KIT0185752 (Achieves <300 CFM, for 600 CFM Blower)<br>KIT0185099 (Achieves <400 CFM, for 1200 CFM Blower) |
| Transition Reducer Kit          | KIT0185271 (10" round down to 8" round - attaches to 10" round transition)                                |

**WARRANTY:<sup>2</sup> Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.