




Undercabinet hood



Learn more

MEASUREMENTS

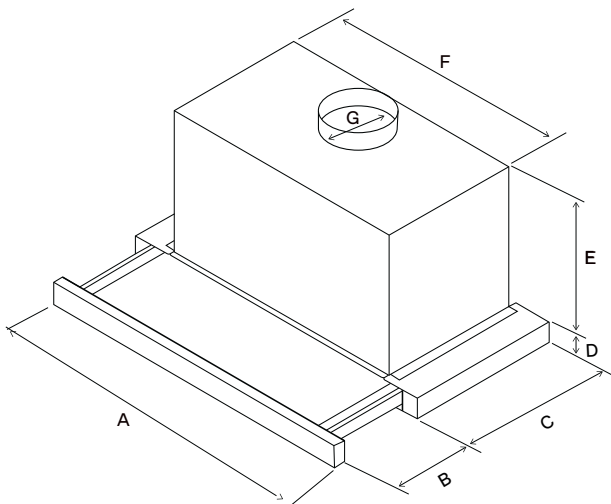

	ETT424S1	ETT430SS	ETT436SS
A	24" (60.9 cm)	30" (76.2 cm)	36" (91.4 cm)
B	6" (15.4 cm)		
C	11" (27.4 cm)		
D	1 9/16" (3.9 cm)		
E	10 3/4" (27.3 cm)		
F	18 1/8" (46 cm)	24 1/2" (62.2 cm)	29 15/16" (76 cm)
G	6" (15.2 cm)		

DESCRIPTION

The ultra-slim design of TT hides quietly within cabinetry and extends less than 2" below the edge. When called to action, the horizontal visor effortlessly pulls out to provide added air capture during cooking. TT design is ideal for smaller kitchens or where under-cabinet space is limited. The 400 CFM blower provides more than adequate power for everyday cooking. The 3-speed blower and LED lighting are operated with modern electronic touch controls, which are out of sight and behind the visor when idle.



FEATURES

- Led light
- Panel ready



GENERAL PROPERTIES

Width	24"	30"	36"
Model	ETT424S1	ETT430SS	ETT436SS
Dimensions	24"W x min:11" max 17"D x 12 5/16"H	30"W x min:11" max 17"D x 12 5/16"H	36"W x min:11" max 17"D x 12 5/16"H
Blower Type** (Internal)	400 CFM (3-speed)		
Noise (Min-max sones)**	0.4-5.0 Sones		
Electrical	120V-60Hz, 245W		
Illumination	2 LED, 2.1W, 3000K		
Finish	Stainless Steel		
Controls	Hidden electronic touch controls		
Filters	Dishwasher-safe, anodized aluminum mesh filter		
Installation type	Ducted or recirculating wit kit (sold separately)		
Duct transition	Round 6" (top discharge)		

KITS

Recirculating kit	CFC0038668 (contains 2 round carbon filters)		
CFM Reduction kit	KIT02748 (achieves <300CFM)		
Deflector	DF01EA (6" round plastic deflector use with CFC0038668)		
Black Panel Kit	KIT0207461 (contains 1 black painted metal panel)	KIT0207465 (contains 1 black painted metal panel)	KIT0207463 (contains 1 black painted metal panel)
White Panel Kit	KIT0207462 (contains 1 white painted metal panel)	KIT0207466 (contains 1 white painted metal panel)	KIT0207464 (contains 1 white painted metal panel)

WARRANTY:* Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

*** For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.