
Scanno

Insert hood

Learn more

MEASUREMENTS

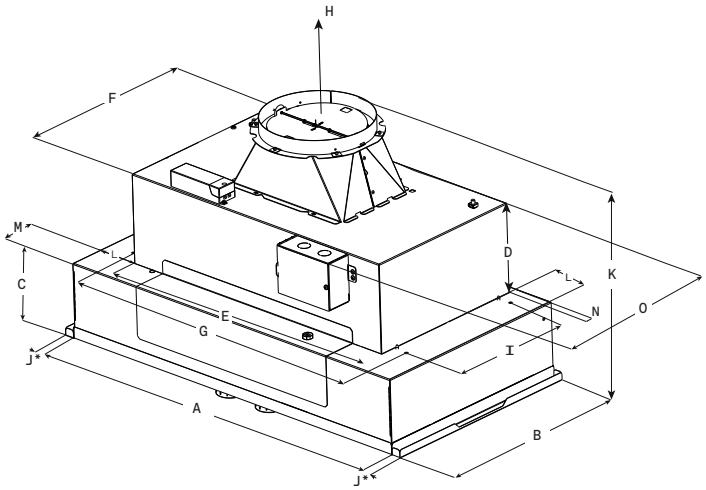

*The spacers are optional depending on the width of the cabinet opening.

	ESC128SS
A	28 3/8" (72.1 cm)
B	15 3/4" (40 cm)
C	5 7/16" (13.8 cm)
D	6 1/2" (16.4 cm)
E	22" (56 cm)
F	12 7/16" (31.6cm)
G	24 5/16" (61.8 cm)
H	8" (20.3 cm)
I	10 1/8" (25.7 cm)
J*	3/4" (1.9 cm)
K	17 1/16" (43.4 cm)
L	3 1/8" (23.8 cm)
M	2 5/8" (6.66 cm)
N	11/16" (1.83 cm)
O	14 5/16" (36.42 cm)

DESCRIPTION

Scanno is available in 28 3/8" width and features a powerful 1200 CFM blower for extraordinary ventilation.

The All-In-One design avoids the need to purchase a stainless steel liner. Scanno comes equipped with ergonomic rotating knob controls which discreetly recess out of sight when not in use and long life LED lighting illuminates the cooking surface.



FEATURES

- Hush system
- Heat guard
- Professional performance
- Grease collectors
- Seamless look

***This product is intended for both Indoor and Outdoor use.**
Models are UL Damp Location Approved for outdoor installation / use under covered patios or lanai.



GENERAL PROPERTIES	
Width	28 3/8”
Model	ESC128SS
Dimensions	28 3/8”W x 15 3/4”D x 11 7/8”H
Blower Type[1] (Internal)	1200 CFM (4-speed)
Noise (Min-max sones)[1]	1.7-8.5 Sones
Electrical	120V-60Hz,913W
Illumination	2 LED, 6.5W, 3000K, 540 Lumen
Finish	Stainless Steel
Controls	Fully Retractable Rotating Knobs with Blue backlighting
Grease filters	2 Dishwasher-Safe, Professional Stainless Steel Angled Baffle Filters
Installation type	Ducted or recirculating with kit
Duct Transition	8” Round with Backdraft Damper (Top Only)

KITS	
External Blower	KIT0153054 (1200 CFM blower, 8” or 10” compatible)
Inline Blower	KIT0154387 (1200 CFM blower, 8” or 10” compatible)
Inline Blower Shell (1200 CFM)	KIT0179549 (For use with 600 OR 1200 CFM blower, 6”, 8” or 10” compatible)
External Blower Shell	KIT0179547 (For use with 1200 CFM blower)
Recirculation (1200 CFM)	KIT0192765 (4 round carbon filters) + KIT0192763 (8” round deflector)
Electronic CFM Reduction Bypass	KIT0185099 (Achives <400 CFM for 1200 CFM Blower)
Transition Reducer Kit	KIT0185271 (10” round down to 8” round - attaches to 10” round transition)


WARRANTY:[2] **Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com**

CUTOUT DIMENSIONS

OVERALL CUTOUT

The dimensions shown below correspond to the required cutout at the bottom of the cabinet.

BOTTOM CUTOUT
(RED AREA)

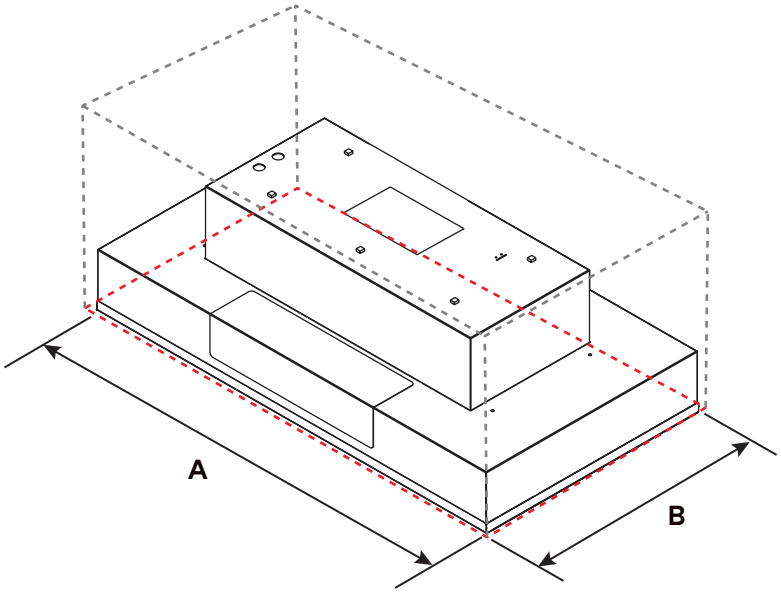

	ESC128SS
A	28 1/2" (72.3 cm)
B	15 13/16" (40.2 cm)

The product images shown are for illustration purposes only and may not be an exact representation of the product.
[1] CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.
[2] For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.