

Torino



Custom Wall Mount Hood

Specification sheet



Learn
more

MEASUREMENTS

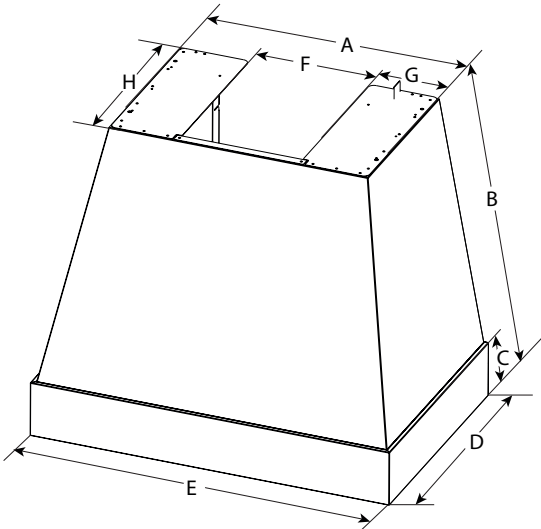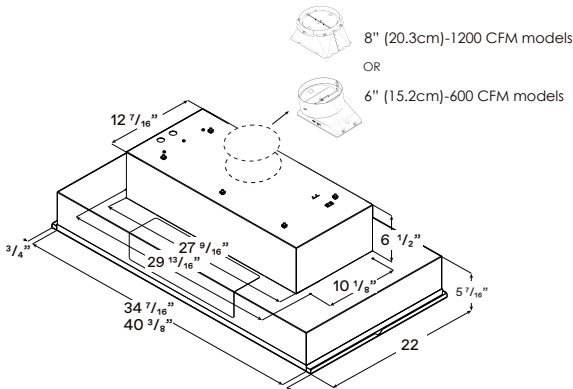

	ETNX36BL ETNX36WH	ETNX48BL ETNX48WH
A	25" (66 cm)	35" (91.4 cm)
B	30" (76.3 cm)	30" (76.3 cm)
C	5 1/2" (14 cm)	5 3/4" (14 cm)
D	24" (60.9 cm)	24" (60.9 cm)
E	36 5/8" (91.4 cm)	48" (122.1 cm)
F	12 1/8" (30.8 cm)	12 1/8" (30.7 cm)
G	6 5/16" (17.6 cm)	11 5/16" (30.3 cm)
H	17 3/8" (44.1 cm)	17 3/8" (44.1 cm)

DESCRIPTION

Introducing the centerpiece of culinary sophistication: our latest kitchen hood from the Disegno Series, available in striking black and versatile white. The black finish exudes modern elegance and boldness, making a powerful statement in any kitchen. In contrast, the white option offers a pristine canvas, perfect for those looking to add their unique touch or blend seamlessly into a minimalist aesthetic. Both finishes are meticulously crafted to elevate the kitchen space, ensuring that this hood not only provides exceptional functionality but also becomes the focal point of your home. With its sleek lines and unique design, it promises to captivate attention and inspire culinary creativity.



FEATURES

- Hush system
- Elica easy mounting
- Heat guard
- Top or Rear outlet installation
- Seamless look
- Professional performance
- Grease collectors



GENERAL PROPERTIES

Width	36 15/16"	48"	36 15/16"	48"
Model	ETNX36BL	ETNX48BL	ETNX36WH	ETNX48WH
Dimensions	36 15/16"W x 24"D x 30"H	48"W x 24"D x 30"H	36 15/16"W x 24"D x 30"H	48"W x 24"D x 30"H
Finish	Stainless Steel +regular steel painted in black matte*		Stainless Steel +regular steel painted in customizable white matte* Can be professionally painted	
Blower type: (sold separately)	Requires purchase of insert hood EAR634SS (600 CFM) for ETNX36BL & ETNX36WH EAR134S4 (1200 CFM) for ETNX36BL & ETNX36WH EAR140S4 (1200 CFM) for ETNX48BL & ETNX48WH			
Installation type	6 easy steps for mounting, compatible with Arezzo insert			

KITS

Duct cover extension (6" tall)	KIT0203059	KIT0203030	KIT0203068	KIT0203069
Duct cover extension (18" tall)	KIT0203032	KIT0203029	KIT0203070	KIT0203071
Compatible with Arezzo hood kits				

6 EASY STEPS FOR MOUNTING


- 1** Drill using installation template.



- 2** Fix support Brackets to wall and ceiling.




- 3** Secure the insert hood to the lower support.

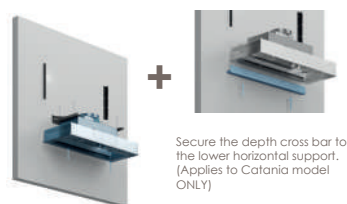

- 4** Affix the ducting. Choose between Rear or Ceiling Outlet.



- 5** Slip the fixed bolts on the shell into the eyelets in the vertical brackets, lay the top of the shell over the ceiling bracket. A solid connection will create a "click".

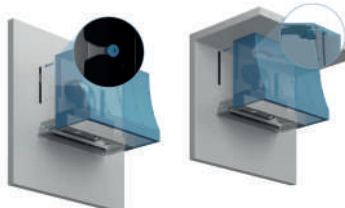

- 6** Secure the insert hood to the Shell from the inside placing the screws on the corresponding drill holes.



*For ceiling flush installation, an optional Trim Kit is available.

SATIN BLACK/HBS2-C2932-C55 WHITE/HWS2-20060-C50 PWDR8

*Powdura® Hybrid Powder Coatings are ideal for indoor decorative and functional uses, offering smooth application, excellent resistance to chemicals and overbaking. The colors are durable, and offer a long-lasting finish. Customize your look further by applying cabinet paint over this coating for a personalized touch. Available in black and white, both can be painted over for a custom look, with the white option providing more of an ideal base for vibrant, personalized finishes.

Arezzo

Insert hood



Oristano Range Hood needs to be paired with the Arezzo Insert Hood.

GENERAL PROPERTIES

Width	34 ⁷ / ₁₆ "	34 ⁷ / ₁₆ "	40 ³ / ₈ "
Model	EAR634SS	EAR134S4	EAR140S4
Dimensions	34 ⁷ / ₁₆ "W x 22"D x 11 ⁷ / ₈ "H	34 ⁷ / ₁₆ "W x 22"D x 11 ⁷ / ₈ "H	40 ³ / ₈ "W x 22"D x 11 ⁷ / ₈ "H
Blower Type ¹ (Internal)	600 CFM (4-speed)	1200 CFM (4-speed)	1200 CFM (4-speed)
Noise (Min-max sones) ¹	1.7-8.5 Sones	1.7-7.0 Sones	1.7-8.5 Sones
Electrical	120V-60Hz,490W	120V-60Hz,913W	120V-60Hz,926W
Illumination	2 LED, 6.5W, 3000K, 540 Lumen		4 LED, 6.5W, 3000K, 540 Lumen
Finish	Stainless Steel		
Controls	Fully Retractable Rotating Knobs with Blue backlighting		
Grease filters	Dishwasher-Safe, Professional Stainless Steel Baffle		
Installation type	Ducted or Recirculating with Kit		
Duct transition	6" Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)	8" Round with Backdraft Damper (Top Only)

KITS

External Blower	KIT0153054 (1200 CFM blower 8" or 10" compatible)
Inline Blower	KIT0154387 (1200 CFM blower 8" or 10" compatible)
Inline Blower Shell (1200 CFM)	KIT0179549 (For use with 600 OR 1200 CFM blower, 6", 8" or 10" compatible)
Inline Blower Shell (600 CFM)	KIT0205342 (For use with 600 CFM blower, 6" compatible)
External Blower Shell	KIT0179547 (For use with 1200 CFM blowers only)
Recirculation (600 CFM)	KIT0192765 (4 round carbon filters) + KIT0195736 (6" round deflector)
Recirculation (1200 CFM)	KIT0192765 (4 round carbon filters) + KIT0192763 (8" round deflector)
Electronic CFM Reduction Bypass	KIT0185752 (Achieve <300 CFM, for 600 CFM Blower) KIT0185099 (Achieve <400 CFM, for 1200 CFM Blower)
Transition Reducer Kit	KIT0185271 (10" round down to 8" round - attaches to 10" round transition)

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.
¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.